

DETAILED TECHNICAL CATALOGUE


SECTIONAL DIRECTIONAL
CONTROL VALVES



GM-PD150

www.gemmaautomotive.com



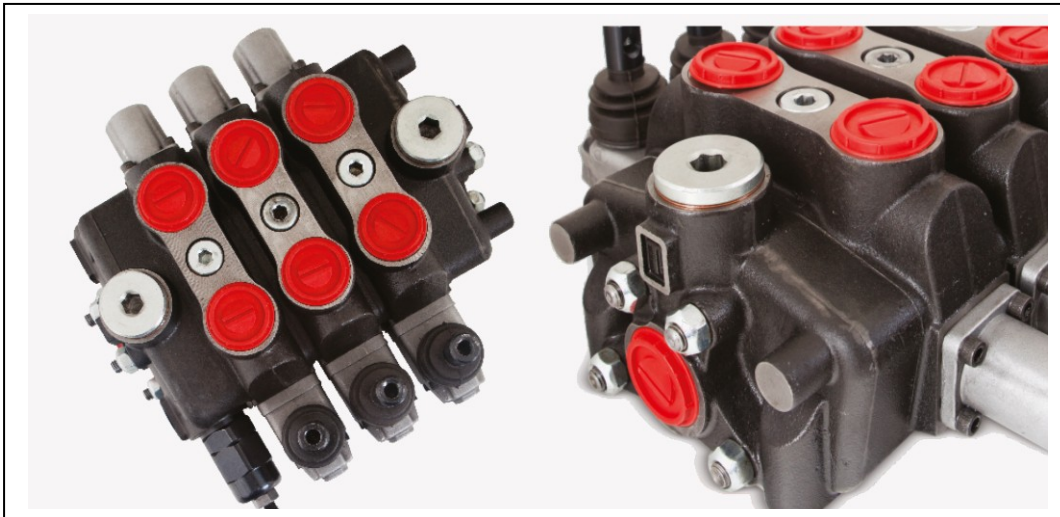

Contents

Working Conditions _____ **3**

Dimensional Data _____ **4**

Hydraulic Circuit _____ **5**

Performance Data And Curve _____ **9**

Inlet Relief Options _____ **10**

Ordering Codes _____ **12**

Inlet Cover- Pump Side _____ **14**

Spool Options _____ **16**

Spool Positioners – Side of Return _____ **19**

Working Section Kit _____ **21**

Spool Positioners – Side of Lever Control _____ **22**

Outlet Cover- Tank Side _____ **23**

Port Valves Options _____ **25**

Installation and Maintenance _____ **28**

Technical Data _____ **29**

Additional Informations

Note:This catalog shows the product in the most standard configurations. For Other Configurations, more detailed information or special request, Please contact Customer Service Dept.

Warning! :All specifications of this catalog refer to the standard product at this date (02/2011) . GEMMA, oriented to a continuous improvement, reserves the right to discontinue, modify or revise the specifications, without notice.

GEMMA IS NOT RESPONSIBLE FOR ANY DAMAGE CAUSED BY AN INCORRECT USE OF THE PRODUCT.

Working Conditions


Nominal Flow Rating / Displacement	150 l/min	38 U.S.G.P.M
Maximum Working Pressure (Series Circuit)	210 Bar	3050 PSI
Maximum Working Pressure (Parallel Circuit)	315 Bar	4600 PSI
Max. Back Pressure	25 Bar	360 PSI
Oil Temperature with NBR Seals	-20 to 80 C°	-4 to 176 F°
with FPM (Viton) Seals	-20 to 100 C°	-4 to 212 F°
Oil Viskosity – Operating Range	From 10 to 75 mm2/s	From 10 to 75 cSt
Minumum / Maximum	10 / 400 mm2/s	10 / 400 cSt
Oil Filtration	≤30 μ	
Ambiant Temperature Range	-35 to 60 C°	-31 to 140 F°
Number Of Spools	1 to 12	
Internal Leakage (at 100 bar (1450 PSI), 40C° (110 F°), 46 cSt – A(B)—T)	3 cm3/min	0,18 in3/min
Max. Level Of Contamination	19/16 - ISO 4406	
Tie rod tightening torque	40 Nm	30 lbft

Not: This catalogue shows technical specifications measured with mineral oil of 46 mm2/s-46 cSt viscosity at 40 C° temparture.

Features

- Simple, compact and heavy duty designed sectional valves from 1 to 12 sections for open and closed center hydraulic systems.
- Optionaly Carry-Over port only tandem circuit.
- Fitted with a main pressure relief valve.
- Interchangeable spool diametre is 20 mm – 0,79 in.
- Available manual, pneumatic, hydraulic and electro-pneumatic spool control kits.

Dimensional Data

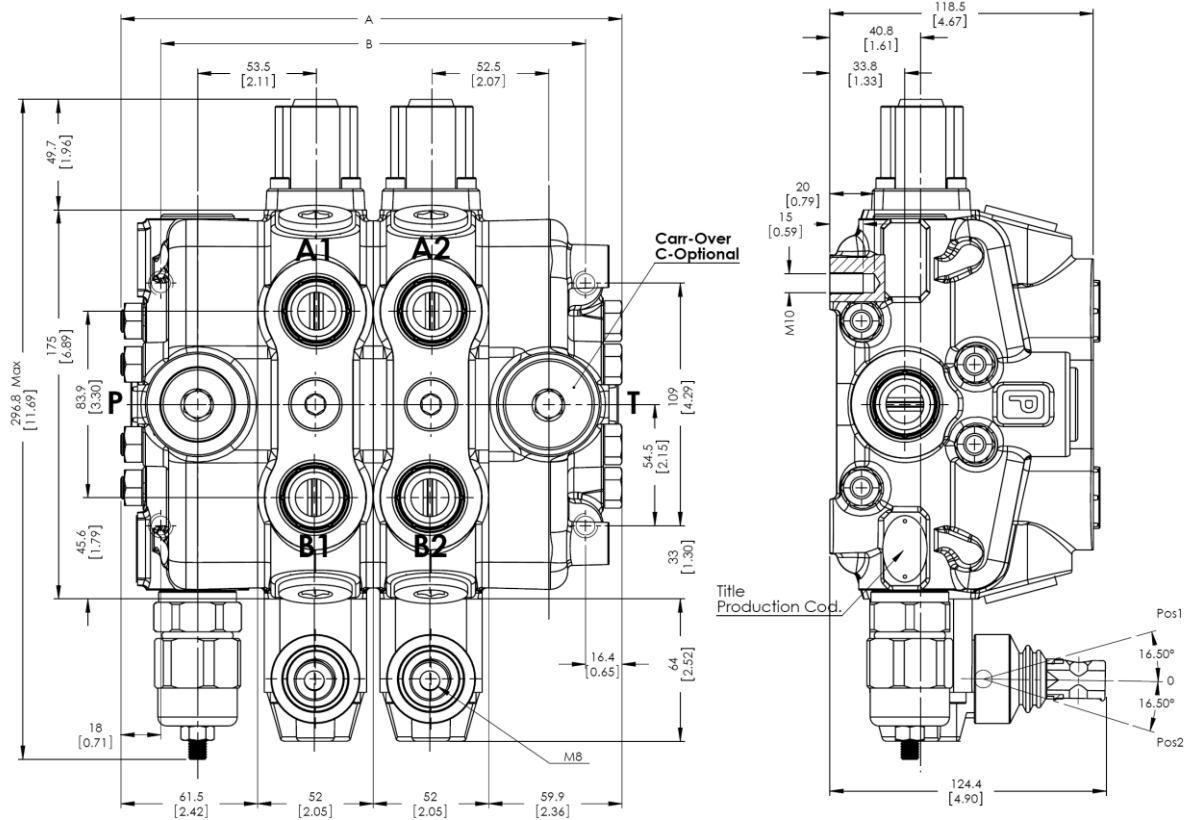



TYPE	A		B		Weight	
	mm	in	mm	in	Kg	lb
GM- PD150-1P	160	6.30	73	2.87	13.46	29.67
GM- PD150-2P	212.5	8.37	125.5	4.94	19.60	43.21
GM- PD150-3P	265	10.43	178	7.00	25.74	56.75
GM- PD150-4P	317.5	12.50	230.5	9.07	31.88	70.29
GM- PD150-5P	370	14.56	283	11.14	38.02	83.83
GM- PD150-6P	422.5	16.63	335.5	13.20	44.16	97.37
GM- PD150-7P	475	18.50	388	14.96	50.30	110.91
GM- PD150-8P	527.5	20.76	440.5	17.34	56.44	124.45
GM- PD150-9P	580	22.83	493	19.41	62.58	137.99
GM- PD150-10P	632.5	24.90	545.5	21.48	68.72	151.53
GM- PD150-11P	685	26.97	598	23.54	74.86	165.07
GM- PD150-12P	737.5	29.03	650.5	25.61	81.00	178.61

Standard Threads

PORT	BSP (Iso 228)		UN-UNF (Iso 11926-1)
	3/4" Series	1"Series	
P Inlet	G 3/4	G 1	1 5/16 -12 UN
A-B Ports	G 3/4	G 1	11/16 - 12 UN
T Outlet	G 1	G 1	1 5/16 -12 UN
Pneumatic	G 1/4	G 1/4	NPTF 1/8 - 27
Carry-Over	G 3/8	G 3/8	G 3/8

Hydraulic Circuit

Parallel

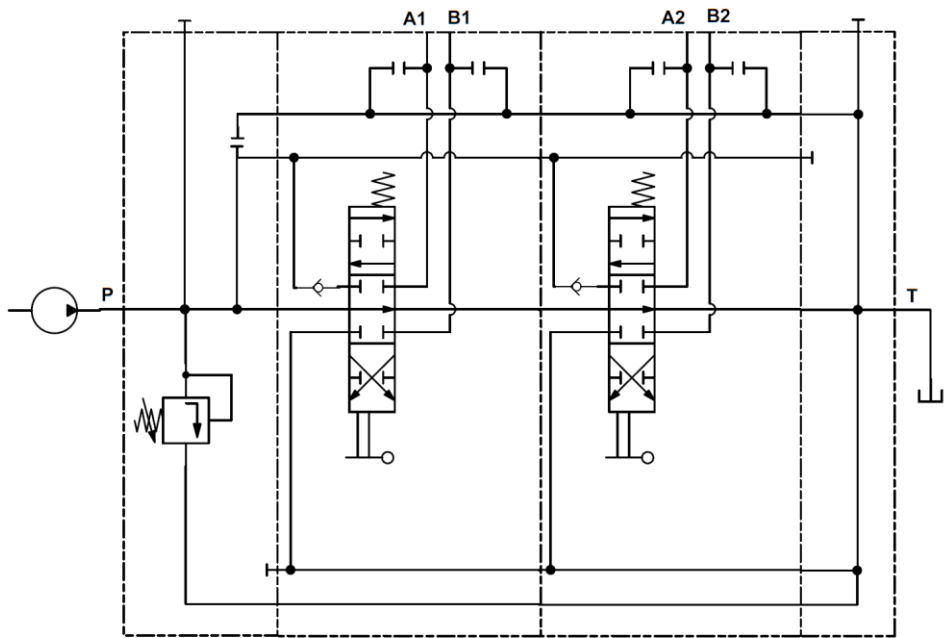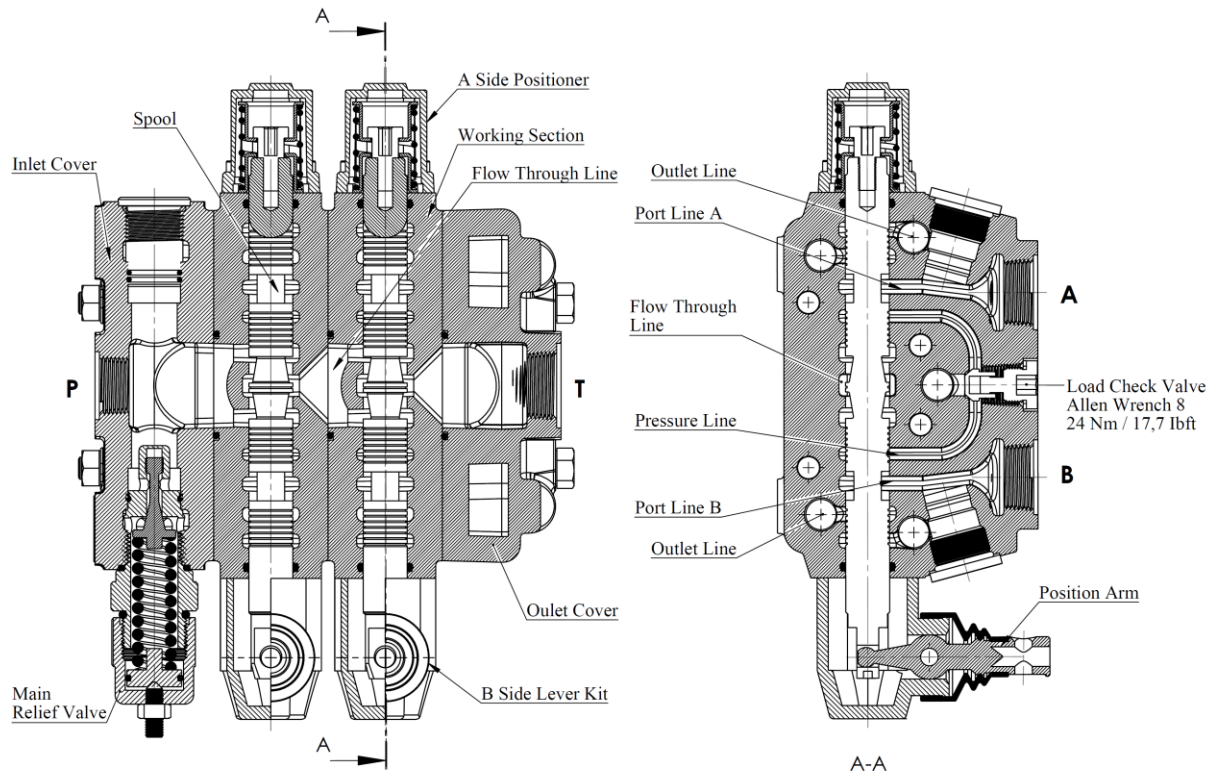





Code: GM-PD150-2P (SD(LA)-SMR2-125-PP)/P-1A-STL-SR/ P-1A-STL-SR/ SO-PT1 / SGT

Hydraulic Circuit

Inlet Cover – Pump Side



SD - Side inlet with direct pressure relief valve
 TD - Top inlet with direct pressure relief valve
 SP - Side inlet with relief valve blanking plug

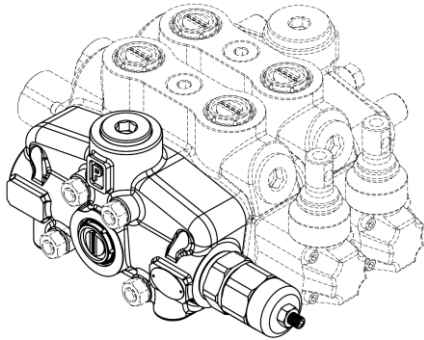

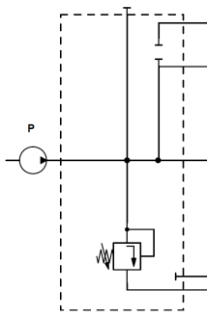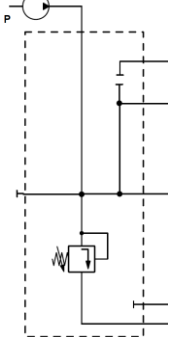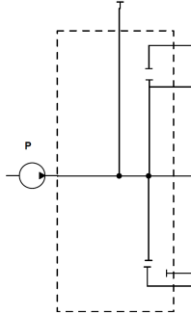Type=SD	Type=TD	Type=SP
		

Working Sections


P – Parallel



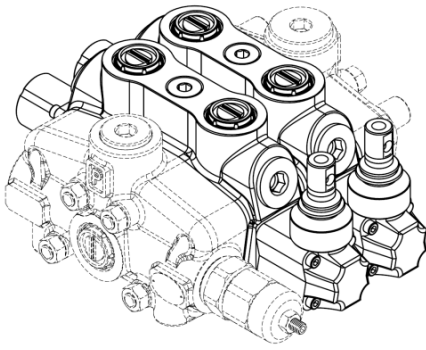
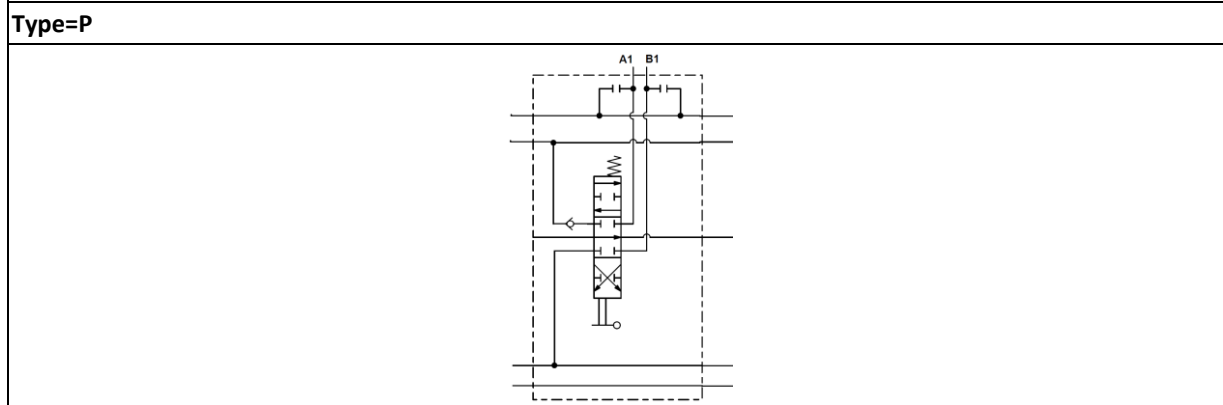



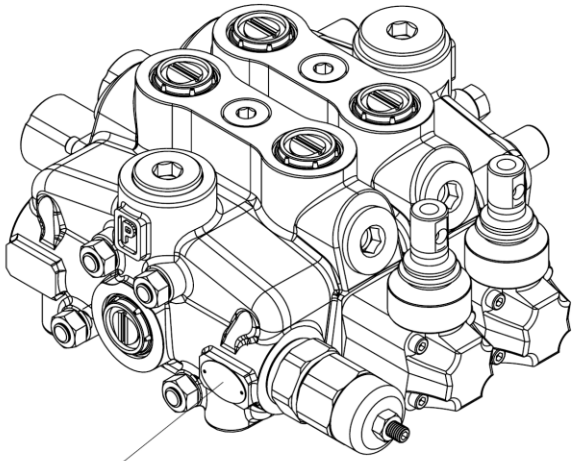
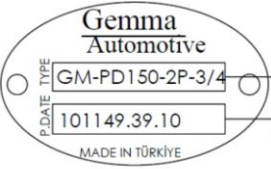
Hydraulic Circuit

Outlet Cover (Tank Side)

SO - Side outlet
 TO - Top outlet
 TCO - Top outlet with carry—over
 TC - Top outlet with closed centre

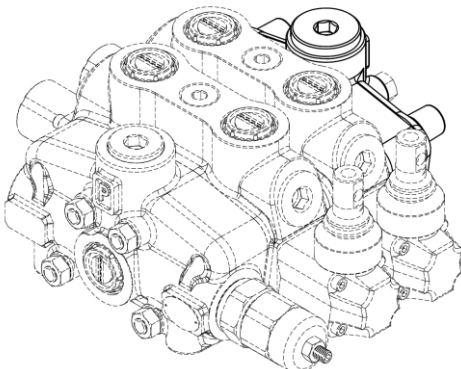

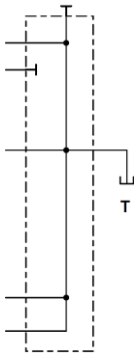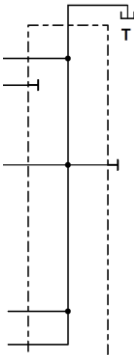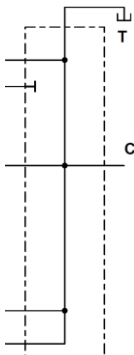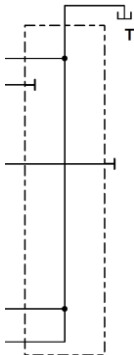Type=SO	Type=TO	Type=TCO	Type=TC
			






Gemma Automotive
 Valve Type
 GM-PD150-2P-3/4
 Production Batch
 39.10 = Production Year - Week (2010/39)
 101149 = Progressive Party Number

Hydraulic Circuit

Standard Configurations With Top Inlet And Outlet Ports - RH (Right Inlet)



A simmetrical body allows the reverse assembly of spool.

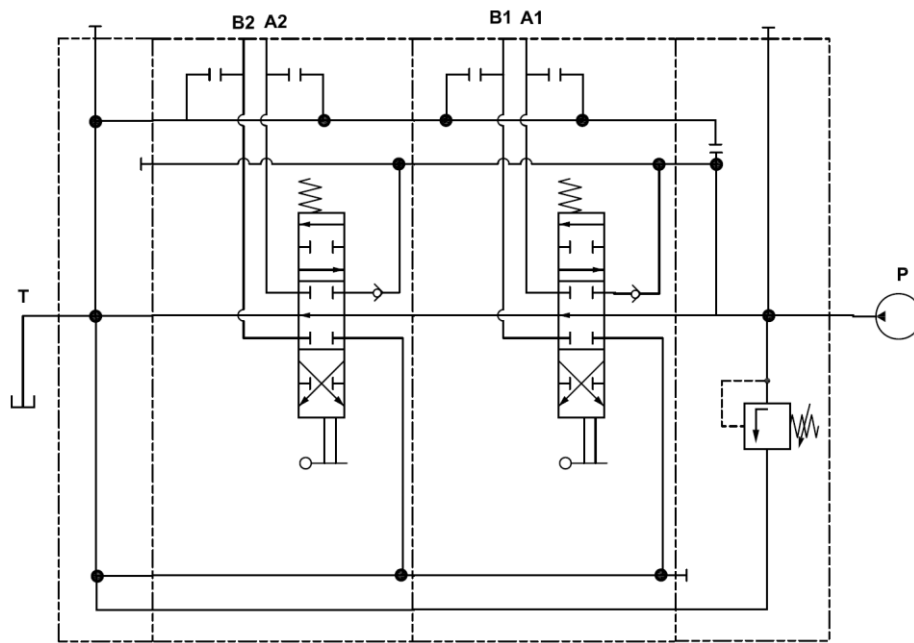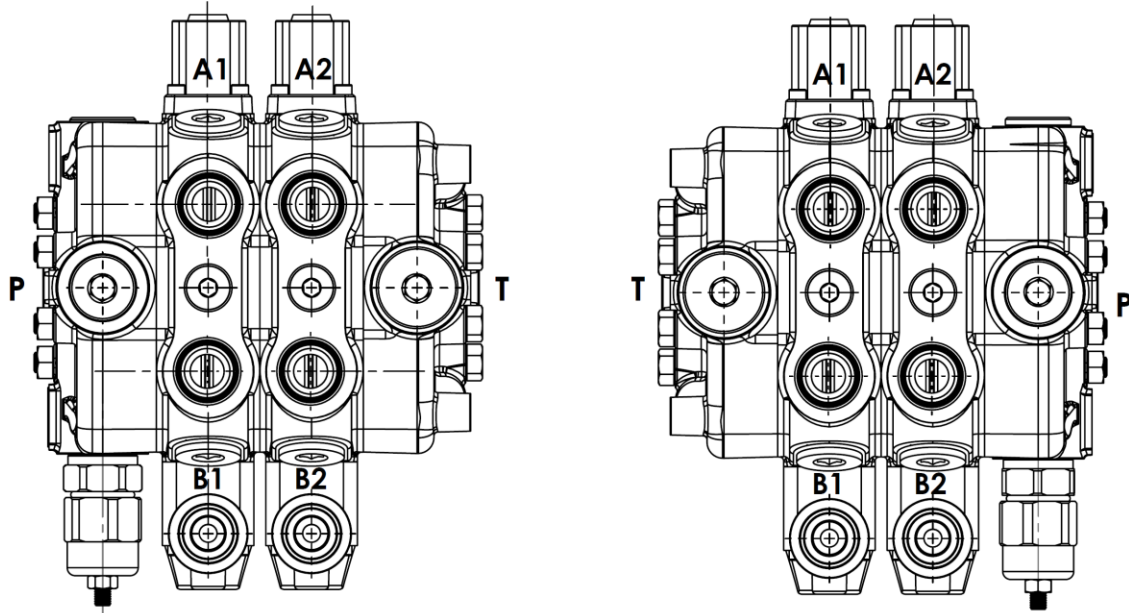



Code: GM- PD150-2P (SD(RA)-SMR2-125-PP)/P-1A-STL-SR/ P-1A-STL-SR/ SO-PT1 / SGT

Performance Data And Curve



Open Center - Pressure Drop (P-T)

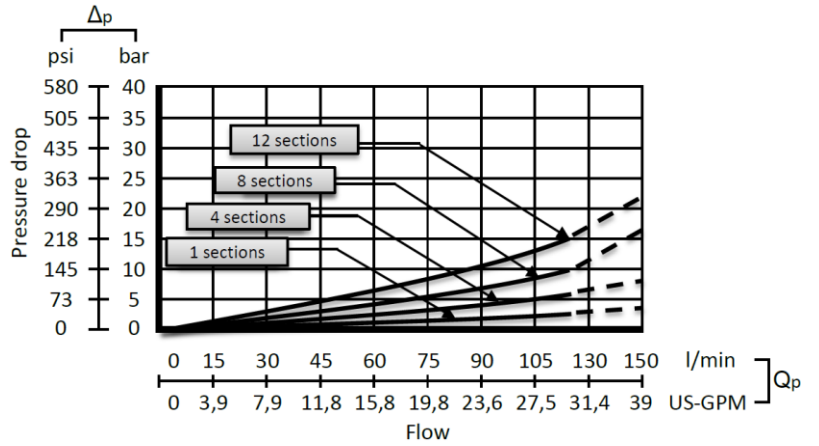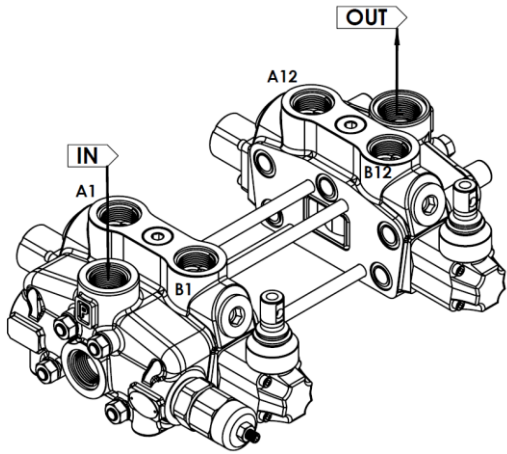

Inlet to Work Port - Pressure Drop (P-A/B)

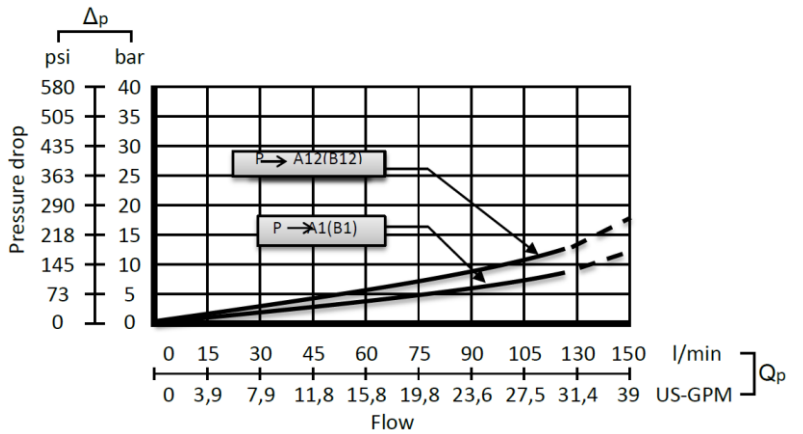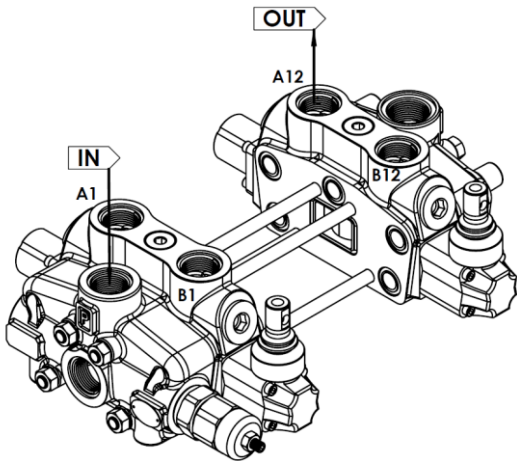

Work Port to Outlet - Pressure Drop (A/B-T)

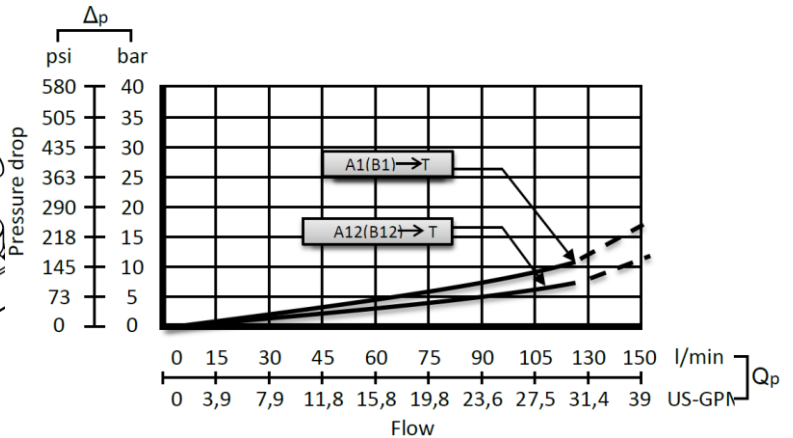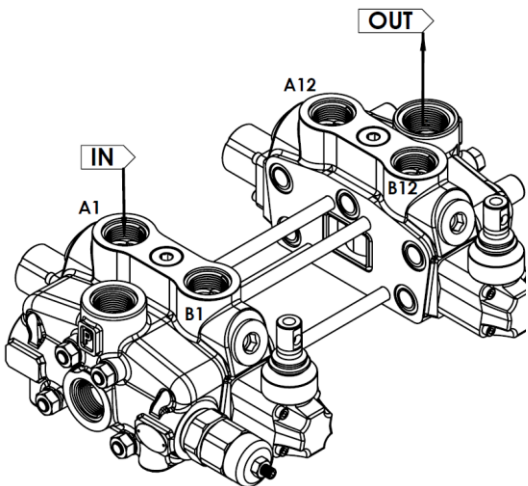


Inlet Relief Options

Direct Pressure Relief Valve


Code: _____

SMR2 – 125



- Pressure Setting Bar in (Standard 125 bar)
- Standard Main Relief Spring Type -2

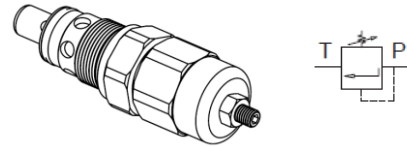

Performance Data: _____

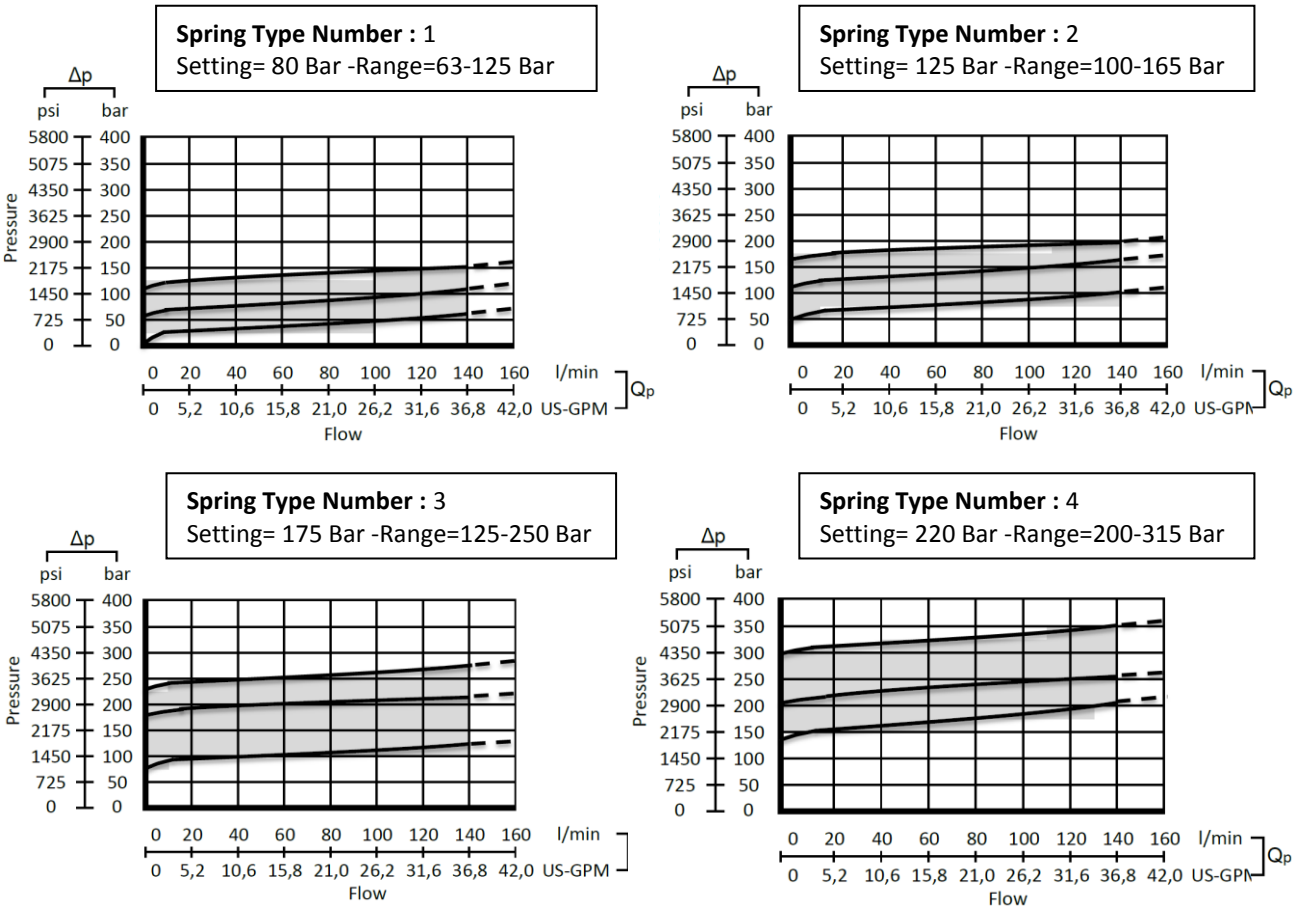




Adjustment Type on Valve: _____

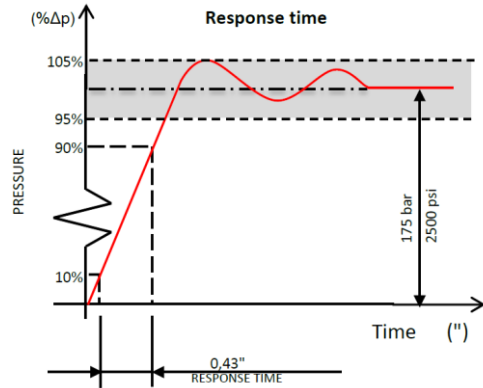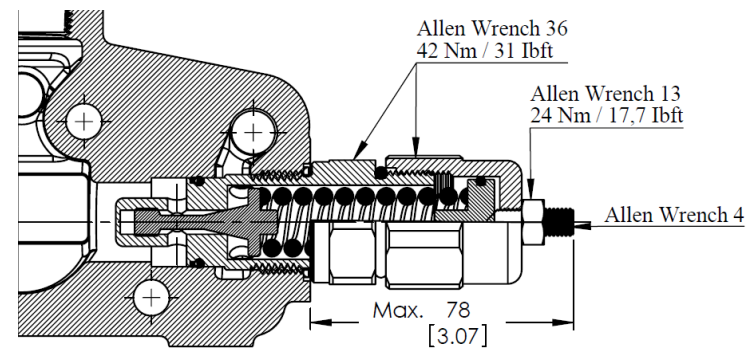


Inlet Relief Options

Direct Pressure Relief Valve


Kit No: PAC
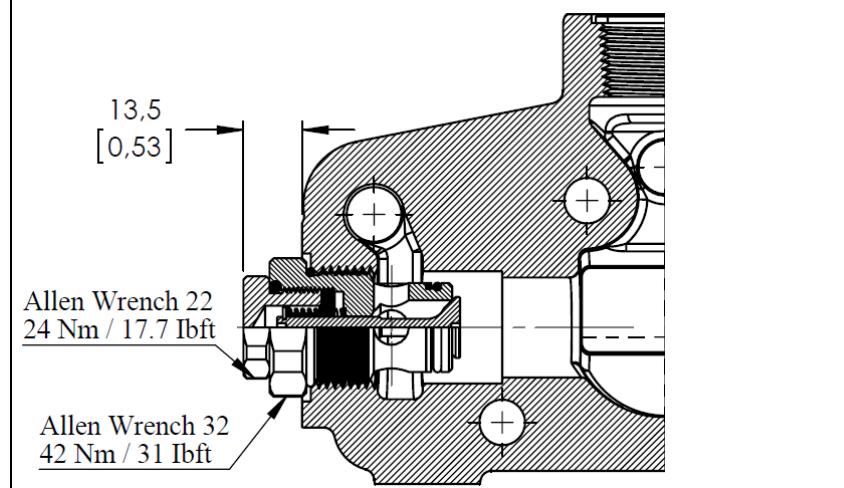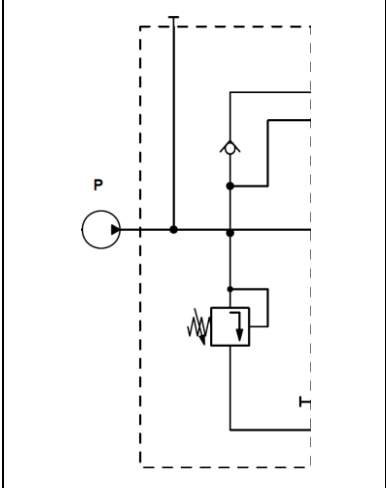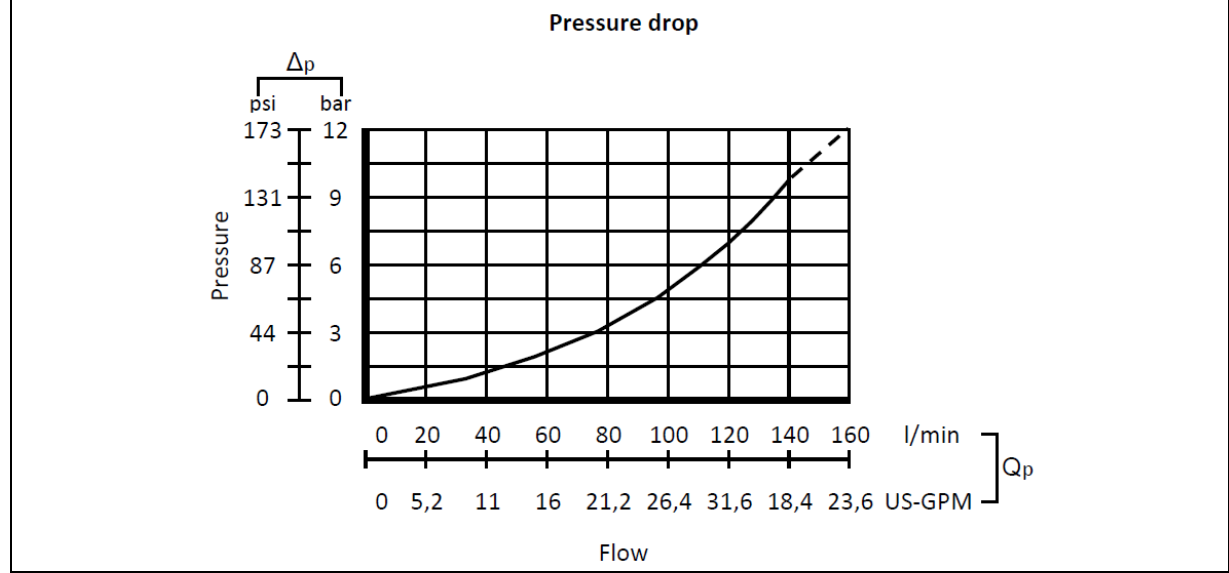
<p>Sectional Appearance</p> 	<p>Diagram</p> 																																								
<p>Performance Data</p> <p style="text-align: center;">Pressure drop</p>  <table border="1"> <caption>Approximate data points from the Pressure drop graph</caption> <thead> <tr> <th>Flow (l/min)</th> <th>Flow (US-GPM)</th> <th>Pressure (bar)</th> <th>Pressure (psi)</th> </tr> </thead> <tbody> <tr><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>20</td><td>5,2</td><td>~1</td><td>~15</td></tr> <tr><td>40</td><td>11</td><td>~2</td><td>~30</td></tr> <tr><td>60</td><td>16</td><td>~4</td><td>~60</td></tr> <tr><td>80</td><td>21,2</td><td>~7</td><td>~100</td></tr> <tr><td>100</td><td>26,4</td><td>~11</td><td>~150</td></tr> <tr><td>120</td><td>31,6</td><td>~16</td><td>~230</td></tr> <tr><td>140</td><td>36,8</td><td>~22</td><td>~320</td></tr> <tr><td>160</td><td>42,0</td><td>~29</td><td>~420</td></tr> </tbody> </table>		Flow (l/min)	Flow (US-GPM)	Pressure (bar)	Pressure (psi)	0	0	0	0	20	5,2	~1	~15	40	11	~2	~30	60	16	~4	~60	80	21,2	~7	~100	100	26,4	~11	~150	120	31,6	~16	~230	140	36,8	~22	~320	160	42,0	~29	~420
Flow (l/min)	Flow (US-GPM)	Pressure (bar)	Pressure (psi)																																						
0	0	0	0																																						
20	5,2	~1	~15																																						
40	11	~2	~30																																						
60	16	~4	~60																																						
80	21,2	~7	~100																																						
100	26,4	~11	~150																																						
120	31,6	~16	~230																																						
140	36,8	~22	~320																																						
160	42,0	~29	~420																																						

Relief Blanking Plug - SP


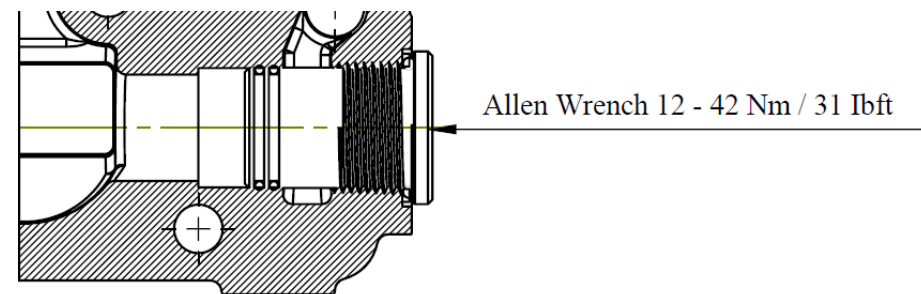


Allen Wrench 12 - 42 Nm / 31 Ibft



Ordering Codes

Order example

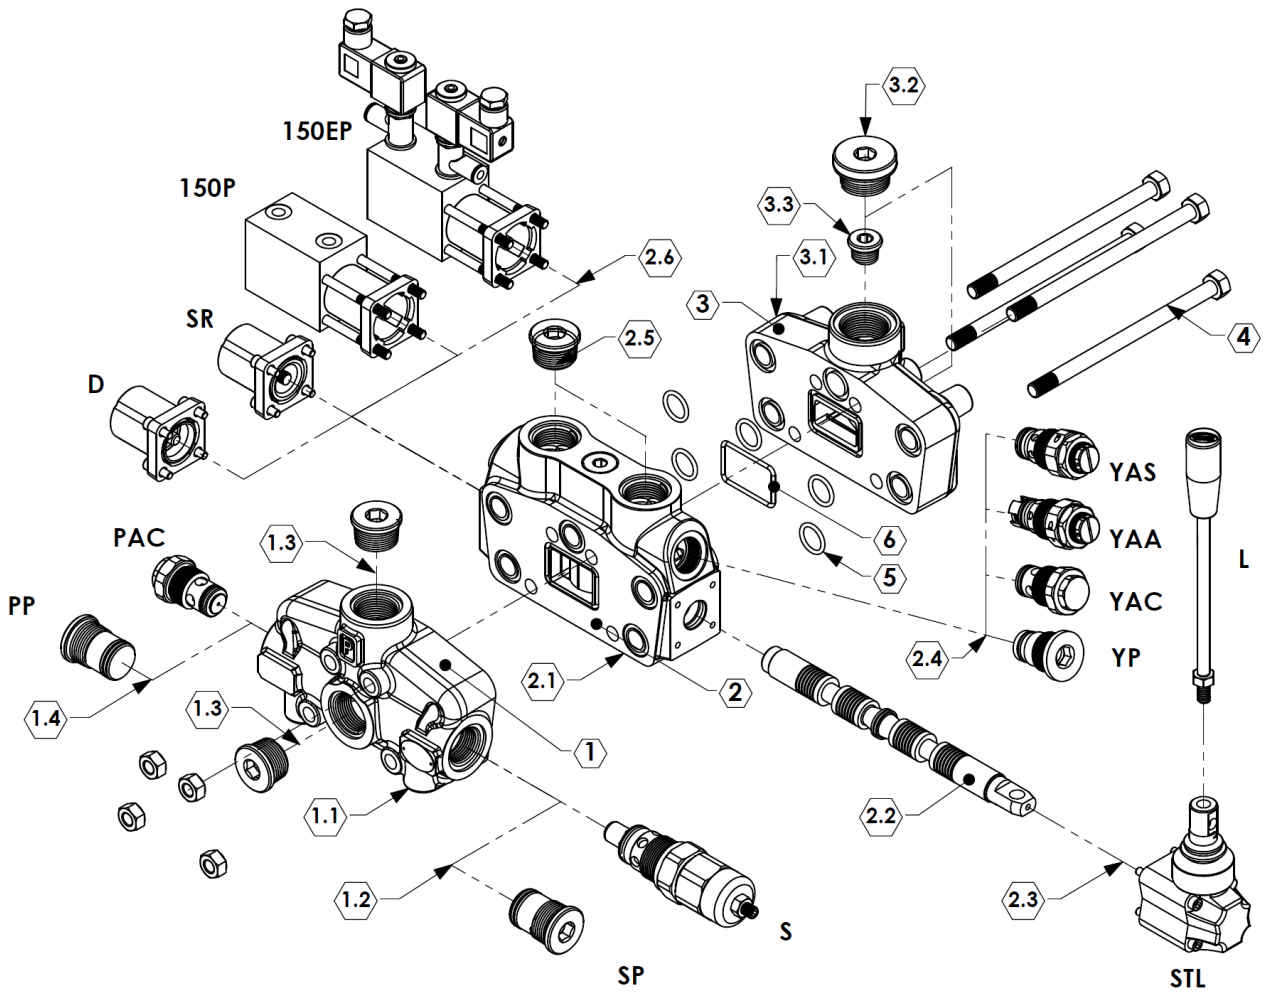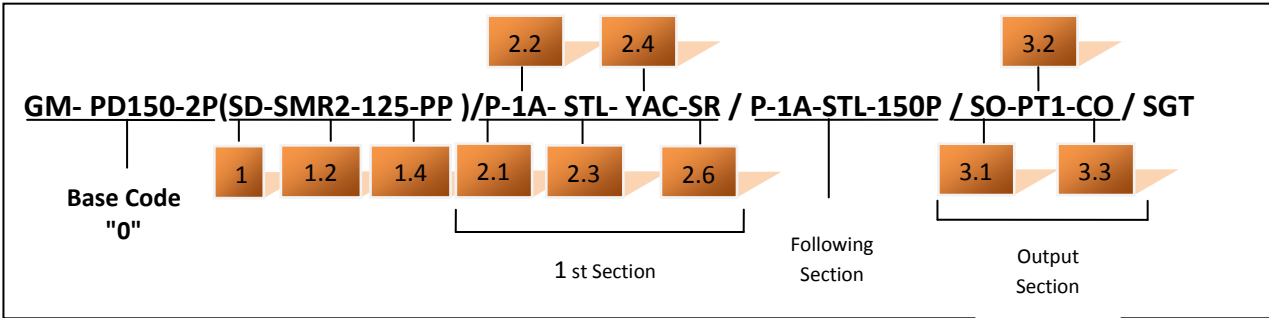

1-Inlet Section

GM- PD150-2P PD150 =Valve Type-(PD)- Sectional (150) - Max. Flow Rate
 2P =Sections Quantity
SD = Side inlet with direct pressure relief valve (1SD150100)
TD = Top inlet with direct pressure relief valve (1TD150100)
SP = Side inlet with relief valve blanking plug (1SP150100)

2-Working Section

P = Parallel (2P150100)

3-Output Section

SO = Side outlet (3SO150100)
TO = Top outlet (3TO150100)
TCO = Top outlet with carry—over (3TCO150100)
TC = Top outlet with closed centre (3TC150100)

Ordering Codes

4-Assembling Kit

Tie rod kit for 1 section valve	- (4TRK1150100)
Tie rod kit for 2 section valve	- (4TRK2150100)
Tie rod kit for 3 section valve	- (4TRK3150100)
Tie rod kit for 4 section valve	- (4TRK4150100)
Tie rod kit for 5 section valve	- (4TRK5150100)
Tie rod kit for 6 section valve	- (4TRK6150100)
Tie rod kit for 7 section valve	- (4TRK7150100)
Tie rod kit for 8 section valve	- (4TRK8150100)
Tie rod kit for 9 section valve	- (4TRK9150100)
Tie rod kit for 10 section valve	- (4TRK10150100)
Tie rod kit for 11 section valve	- (4TRK11150100)
Tie rod kit for 12 section valve	- (4TRK12150100)

5-6-O_Ring Kit

5. -17.00x2.65 NBR 70 SH O-Ring seal (3 Qty.)	(5MK150100)
6. -34.60x2.62 NBR 70 SH O-Ring seal (1 Qty.)	(6MK150100)

1.*-Inlet Options

1.1 Inlet Cover

Body = Standard (11BS150100)

1.2 Inlet Relief

SMR1-080 – (12SMR1150080)–Range 63-125 bar
Setting 80 bar

SMR2-125 – (12SMR2150120)–Range 100-160 bar
Setting 125 bar

SMR3-175 – (12SMR3150175)–Range 125-250 bar
Setting 175 bar

SMR4-220 – (12SMR4150220)–Range 200-315 bar
Setting 220 bar

1.3 Ports Plug

PA1 =G3/4 Top and side input - (13PA1150100)

PA2= G1 Top and side input –(13PA2150100)

1.4 Inlet Valve

PAC = Inlet anti-cavitation valve –(14PAC150100)

PP(SP) = Relief valve blanking plug –(14PSP150100)

3.*- Working Options

3.1 Working Section

Body = Standard (31BS150100)

3.2 Output Plug

PT1 =G1 Top and Side output (32PT1150100)

3.3 Circuits Options

CO =G1/8 Carry–Over Connector (33CO150100)

2.*- Working Options

2.1 Working Section

PA= Without ports valve prearrangement, with parallel circuit - Body (21BSPA150100)

2.2 Spool Options

1A -(22SS150110) – 3 Positions ,Double acting

2A -(22SS150120) – 3 Positions ,Double acting
A to tank B Blocked

3A -(22SS150130) – 3 Positions ,Double acting
B to tank A blocked

4A -(22SS150140) – 3 Positions ,Double acting
A and B tank

5A -(22SS150150) – 3 Positions ,Single acting on
A (A to tank)

6A -(22SS150160) – 3 Positions ,Single acting on
B (B to tank)

2.3 Lever Options

L =Standard HandLever (L=120mmxM8) -
(7L040100)

STL=Standard Lever –(23STL150100)

2.4 Port Relief Valves

Anti-Shock Valve

YAC (T1-50) – (24YAC150050)–Range 35-70 bar
Setting 50 bar

YAC (T1-100) – (24YAC150100)–Range 63-220 bar
Setting 100 bar

YAC (T1-200) – (24YAC150200)–Range 180-350 bar
Setting 200 bar

Anti-Shock and Anti-Cavitation Valve

YAA (T1-63) – (24YAA150063)–Range 35-70 bar
Setting 50 bar

YAA (T1-100) – (24YAA150100)–Range 63-220 bar
Setting 100 bar

YAA (T1-200) – (24YAA150200)–Range 180-350 bar
Setting 200 bar

YAS - Anti Cavitation– (24YAS150100)

YP- A and B ports valve blanking plug (24YP150100)

DST-A and B ports valve blanking plugs with
connection to tank–(24DST150100)

2.5 Ports Plug Options

PL1 =Plug for single action spool for 2A-3A, G3/4
(25PL1150100)

PL2 =Plug for single action spool for 2A-3A, G1
(25PL2150100)

2.6 Spool Positioners

SR=Spring Return in neutral position – (26SR150100)

D =Detent in position 1, neutral and 2 -(26D150100)

150P=ON/OFF Pneumatic – (2645P150100)

150EP=12 VDC ON/OFF electro-pneumatic –
(2680EP150112)

24 VDC ON/OFF electro-pneumatic –
(2680EP150124)

Inlet Cover- Pump Side

LH Inlet Valve Options

Type No:LA

Sectional Appearance

Allen Wrench 12
42 Nm / 31 Ibft


B-B

Type No:LB

Sectional Appearance




Allen Wrench 12
42 Nm / 31 Ibft

B-B

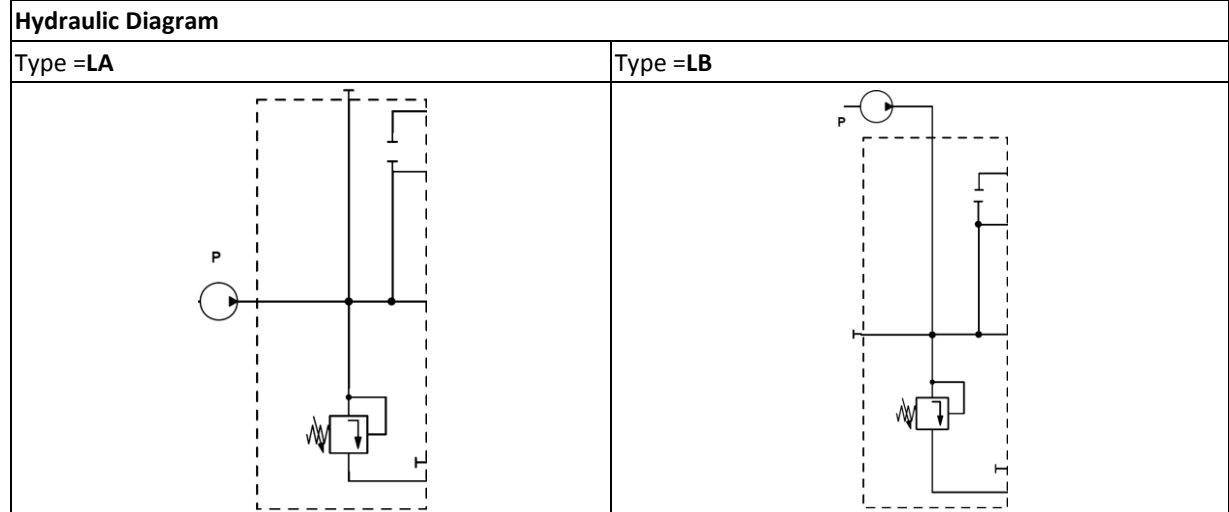


Inlet Cover- Pump Side

RH Inlet Valve Options

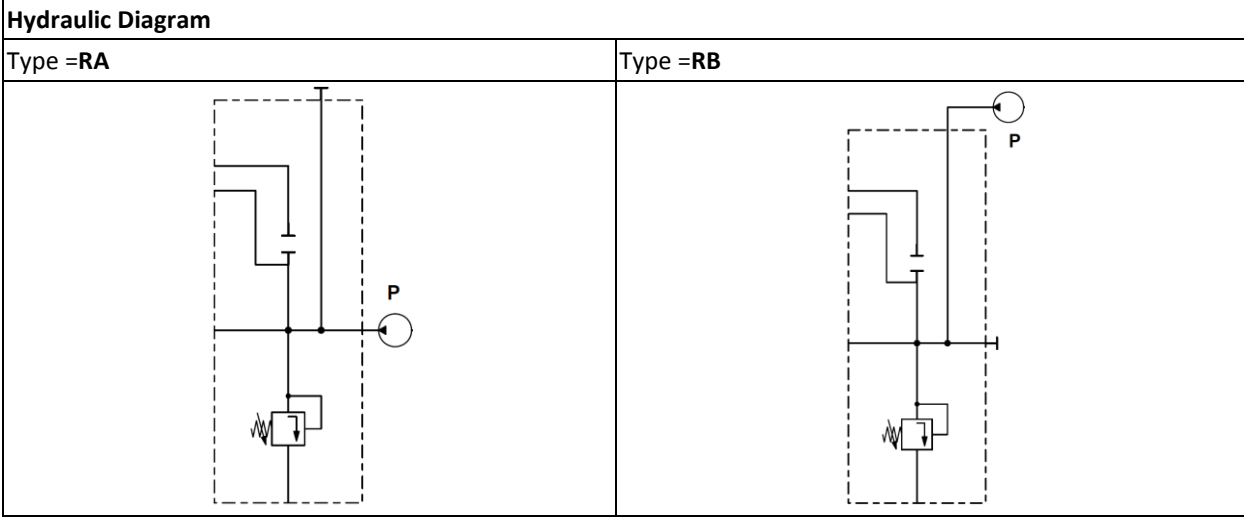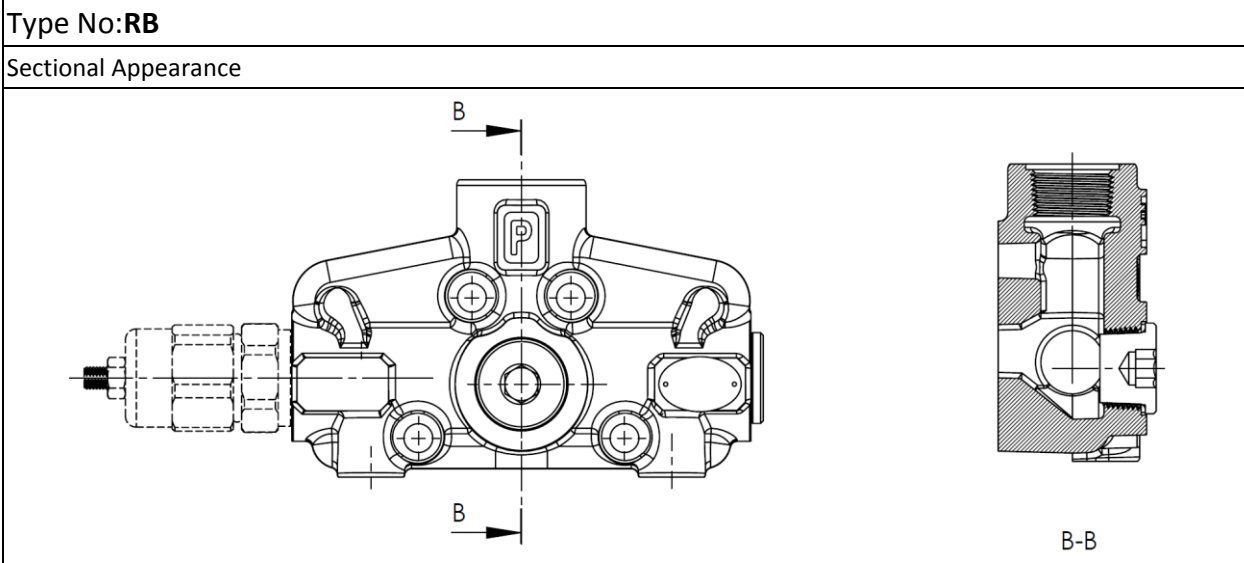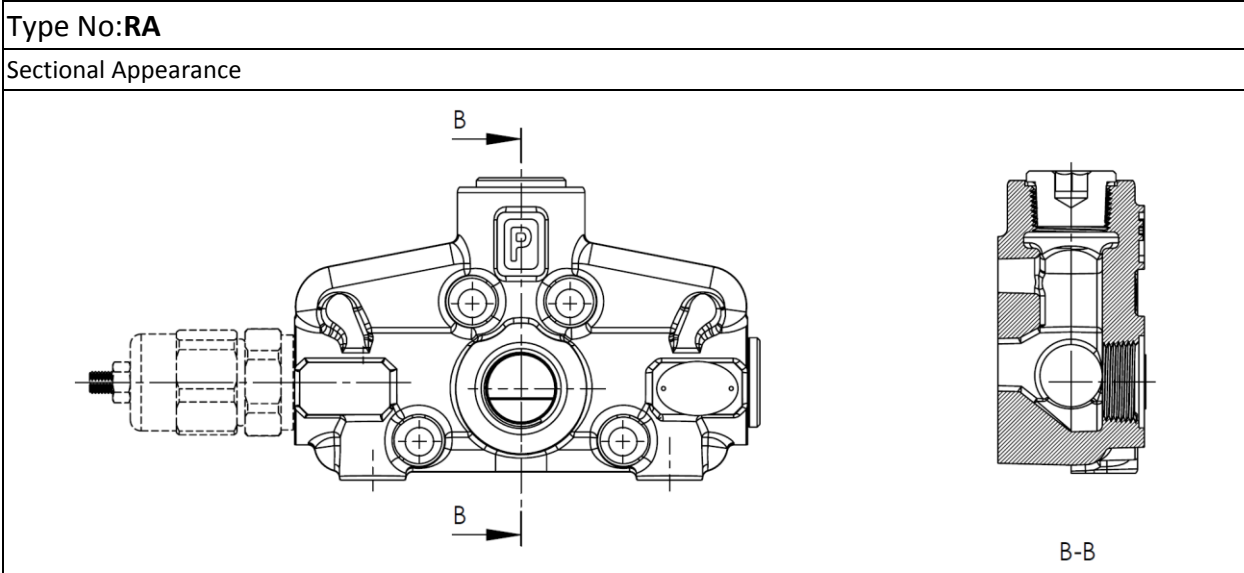


Spool Options

Spool Type - 1A

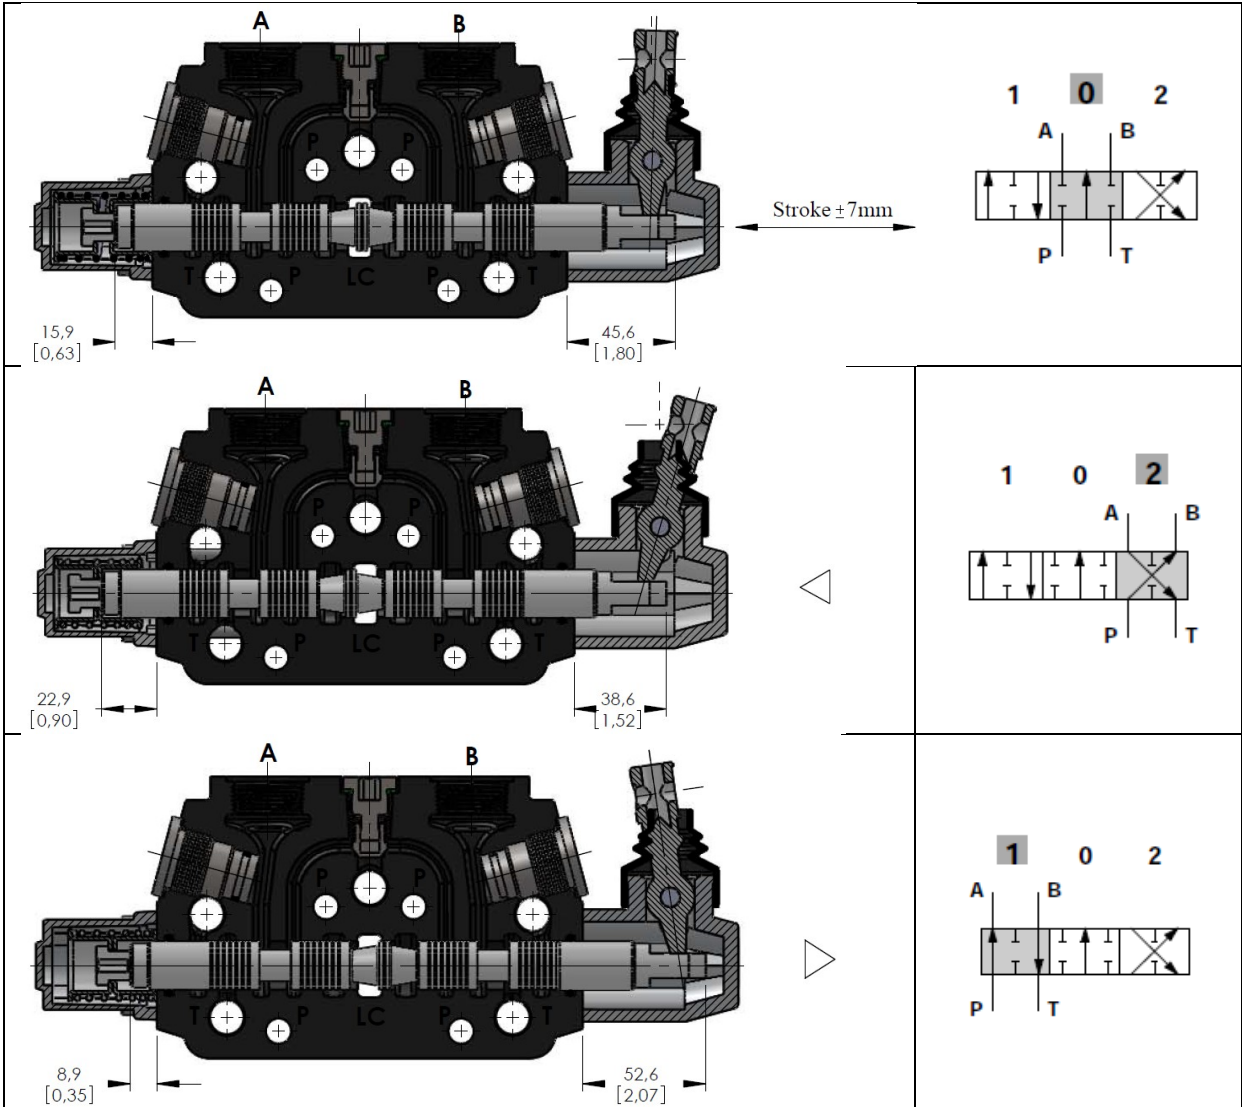


Performance Curve And Data: ➔

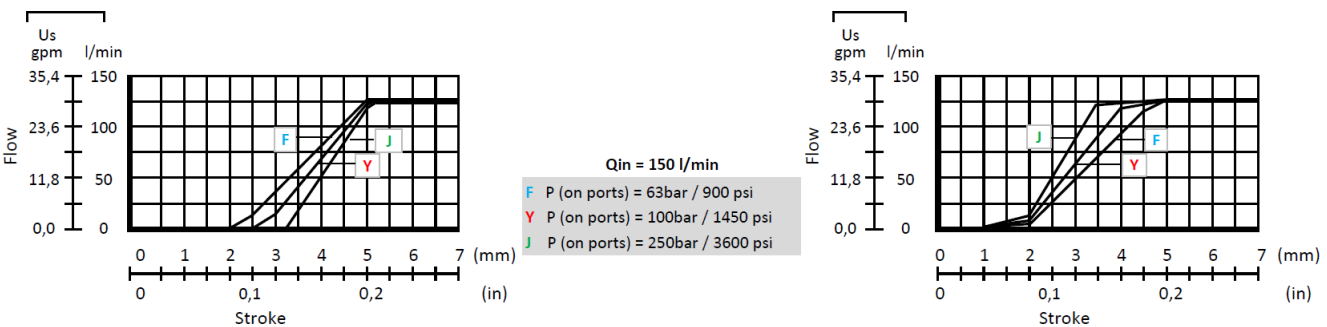


Spool Options


Spool Type - 2A

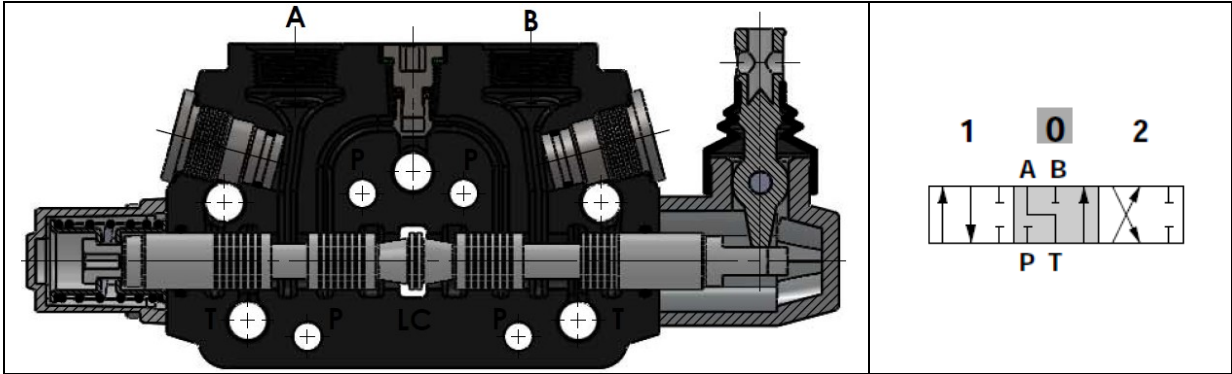

Spool Type - 3A

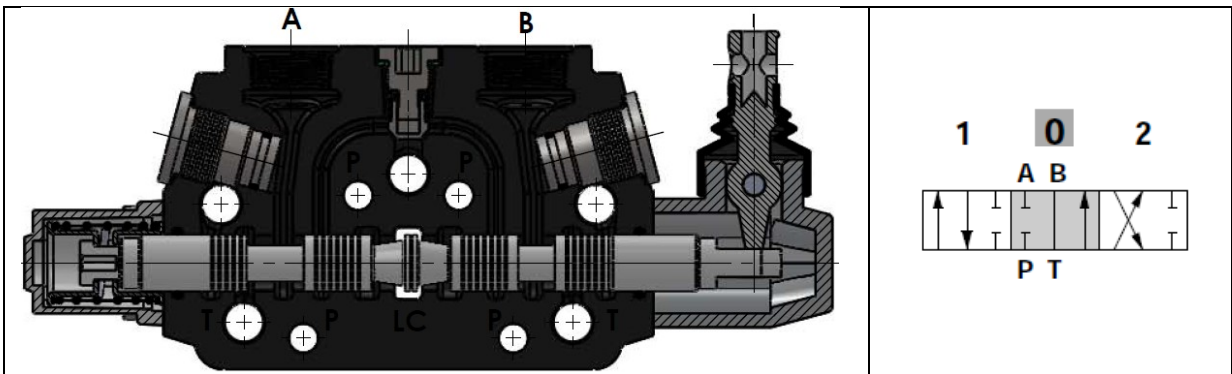


Spool Type - 4A

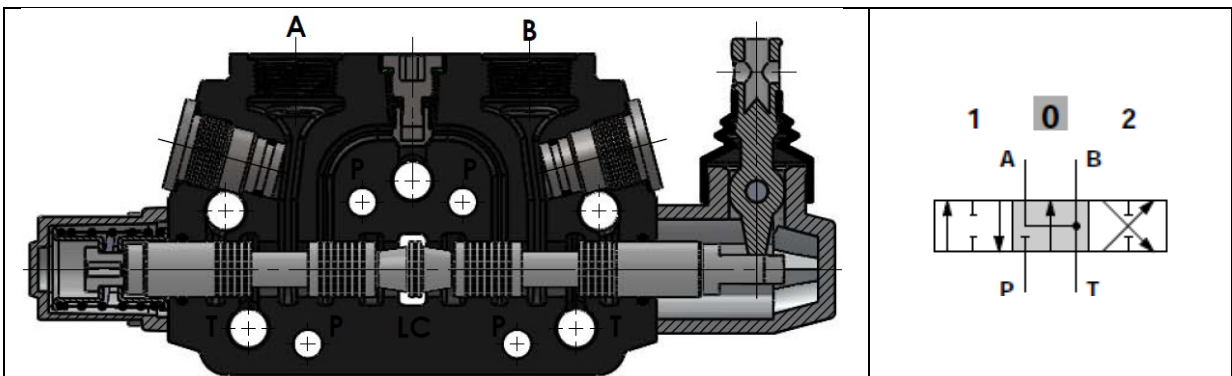


Spool Options

Spool Type - 5A

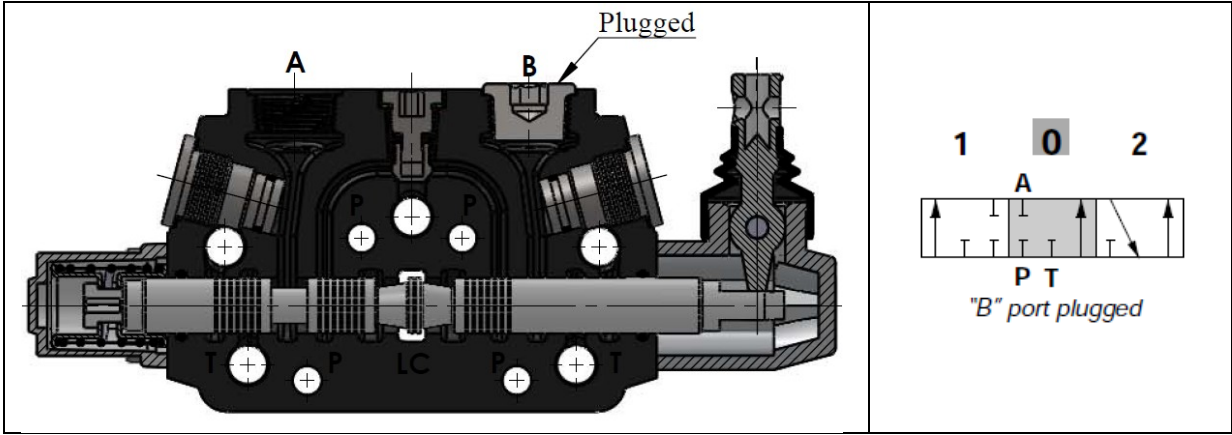

Spool Type - 6A

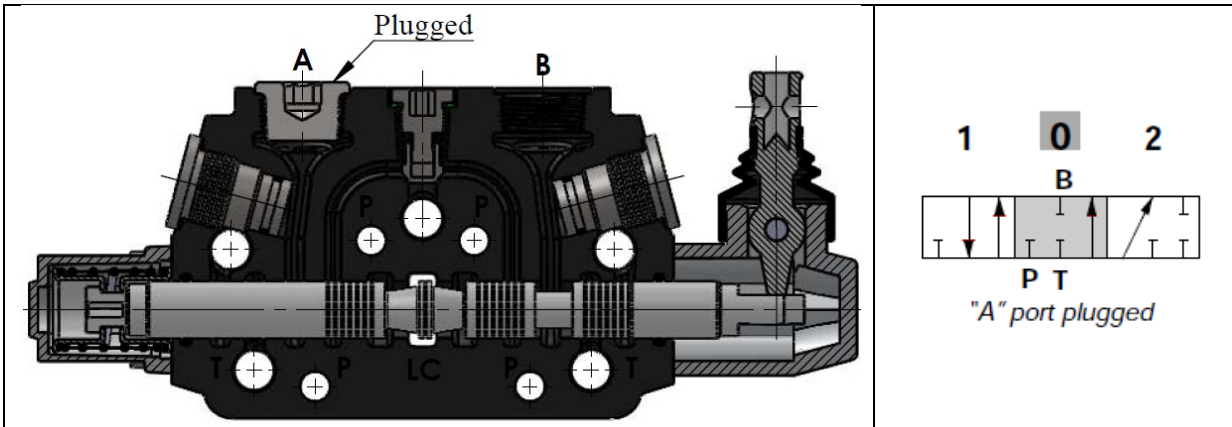

Spool Positioners - Side of Return


With Spring Return in Neutral Position

Kit No:SR	
Sectional Appearance	Diagram

With Detent



Kit No:D	
Sectional Appearance	Diagram

Force - stroke diagram


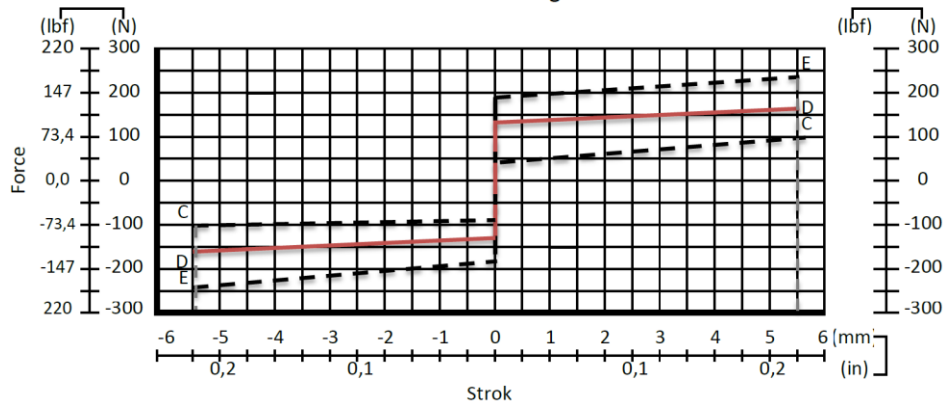


Spool Positioners – Side of Return

ON/OFF Pneumatic Control

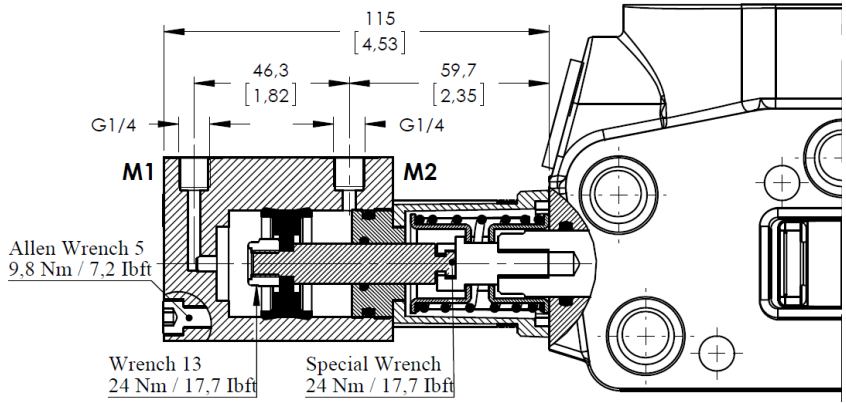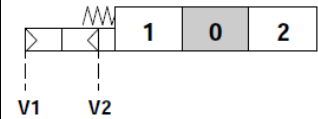Kit No: 150P	
<p>Sectional Appearance</p> 	<p>Diagram</p> 
<p>Operatig Features Pilot Pressure: 6 Bar (Max. 10) / 87 Psi (Max. 145)</p>	

ON/OFF Electro-Pneumatic Control

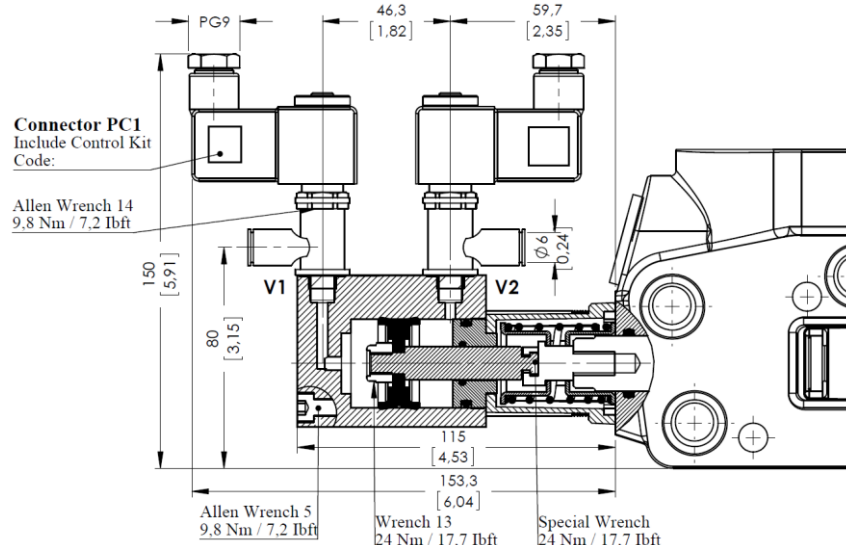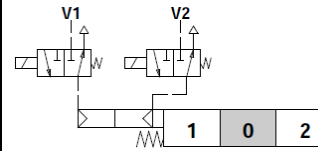Kit No:150EP	
<p>Sectional Appearance</p> 	<p>Diagram</p> 
<p>Operatig Features Pilot Pressure: 6 Bar (Max. 10) / 87 Psi (Max. 145)</p> <p>Selonoid Operating Features Nominal Voltage.....: 12VDC / 24 VDC Power Rating.....: 6 W</p>	

Working Section Kit

With Port Valves Type





Kit No: AA	
Sectional Appearance	Diagram

Without Port Valves Type

Kit No: AB	
Sectional Appearance	Diagram

Spool Positioners – Side of Lever Control

Lever Controls
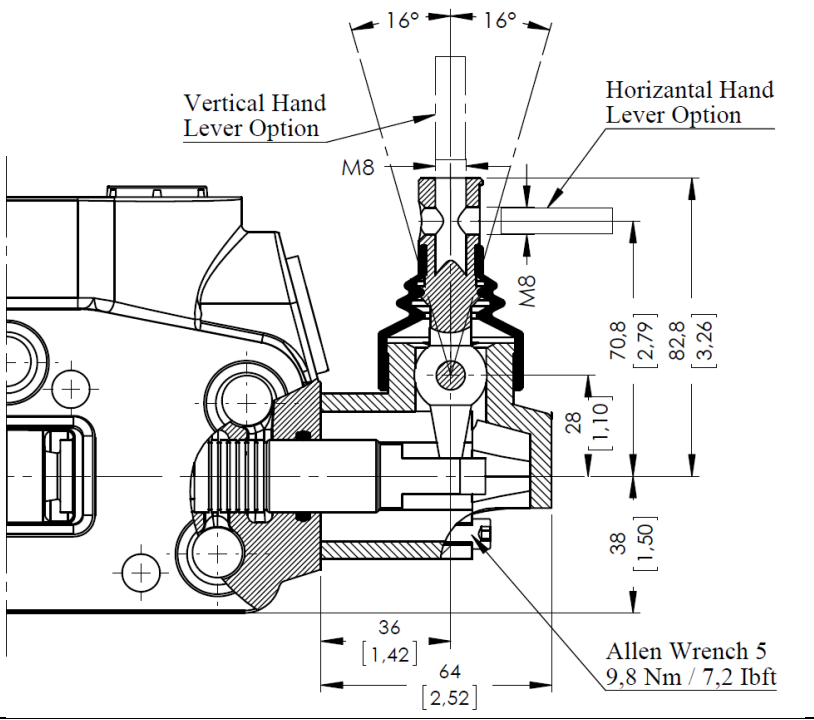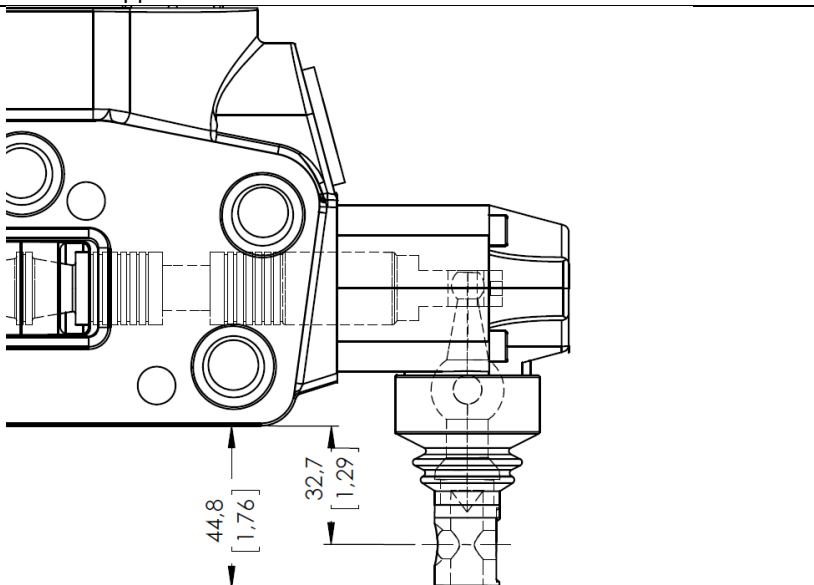
<p>Kit No: STL - L0</p>	
<p>Sectional Appearance</p> 	<p>Diagram</p> 
<p>Kit No: STL - L180</p>	
<p>Sectional Appearance</p> 	<p>Diagram</p> 
<p>Note: Alluminium with protection arm lever pivot box, it can be rotated 180°.</p>	

Outlet Cover- Tank Side

Output Cover Options

<p>Type No:TA</p> <p>Sectional Appearance</p>	
<p>Type No:TB</p> <p>Sectional Appearance</p>	
<p>Hydraulic Diagram</p>	
<p>Type = TA</p>	<p>Type=TB</p>

Outlet Cover- Tank Side

Output Cover Options

Type No:TC

Sectional Appearance

Type No:TD

Sectional Appearance

Hydraulic Diagram


Type = TC	Type=TD

Port Valves Options


Anti Cavitation Valves

Code: _____ →


- YAC -1(T1-100)** → Pressure setting in bar.
- Adjusting type T=With screw , L=Valve Set / Spring Type (1,2,3)
- 1= Mounted Port A , 2=Mounted Port B , 3=Mounted Port A and B

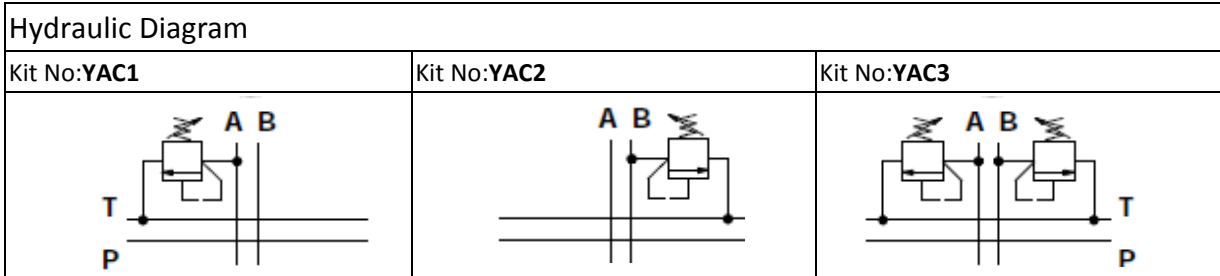

Adjustment Type on Valve: _____ →

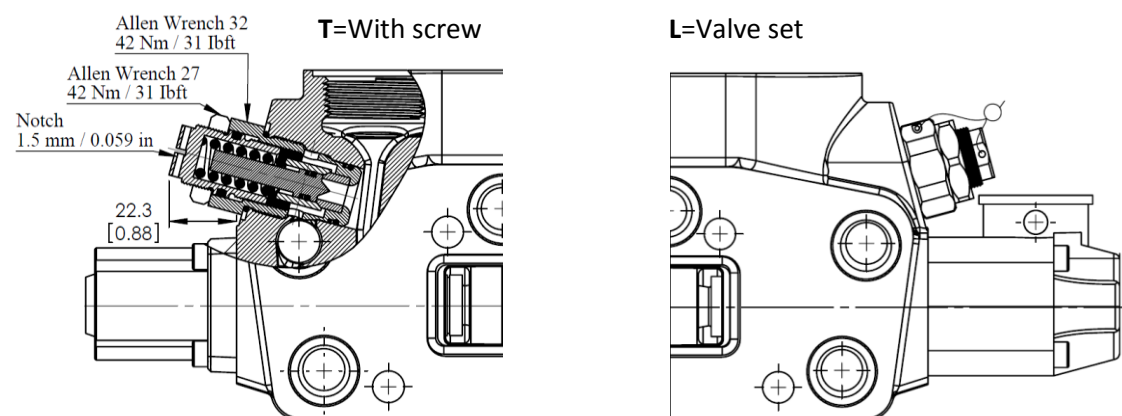

Performance Data: _____ →

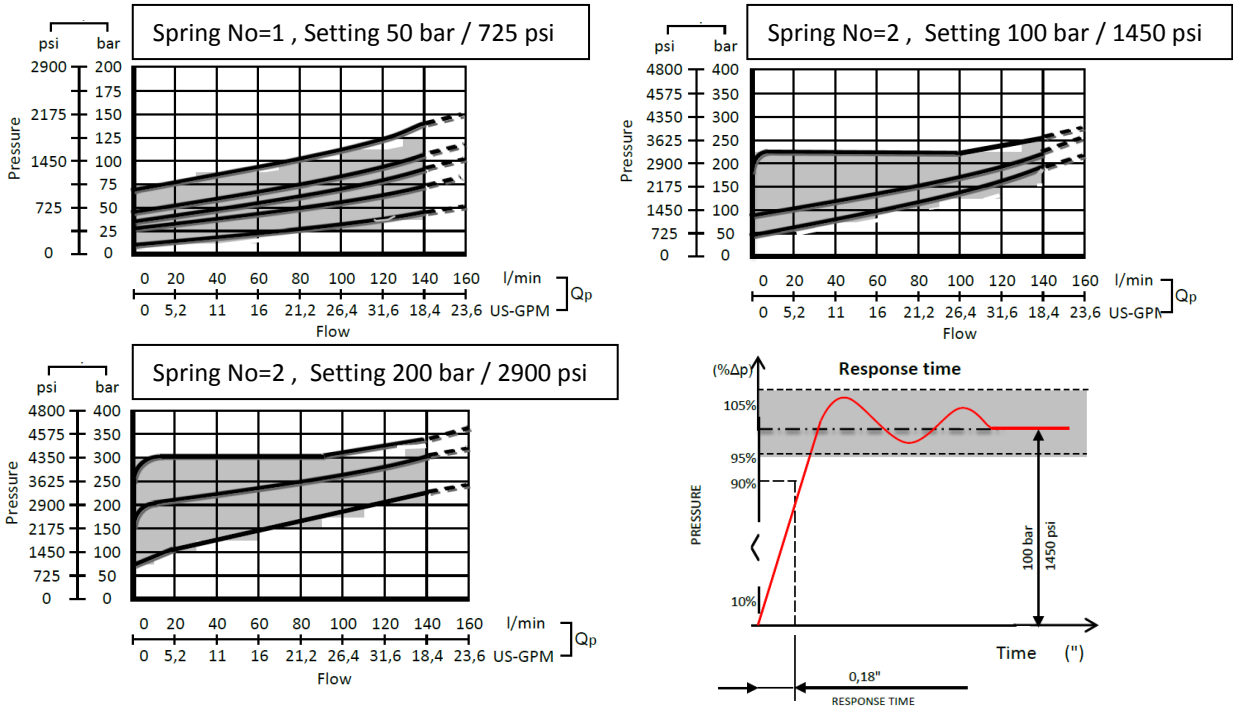


Port Valves Options

Anti shock And Anti Cavitation Valves


Code: _____ →

YAA -1(T1-100)


- Pressure setting in bar.
- Adjusting type T=With screw , L=Valve Set / Spring Type (1,2,3)
- 1= Mounted Port A , 2=Mounted Port B , 3=Mounted Port A and B

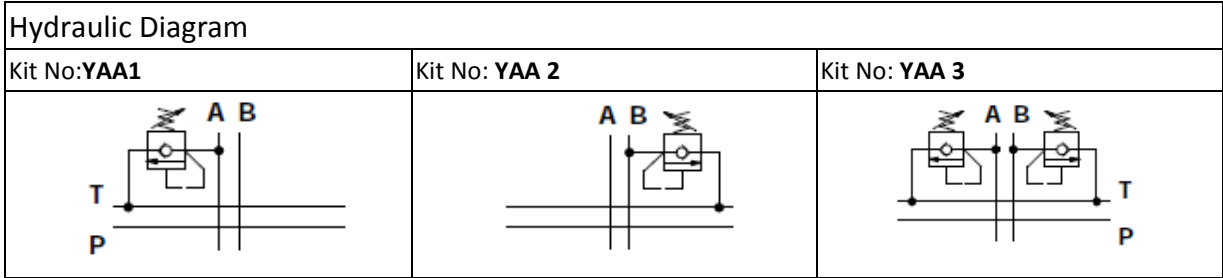

Adjustment Type on Valve: _____ →

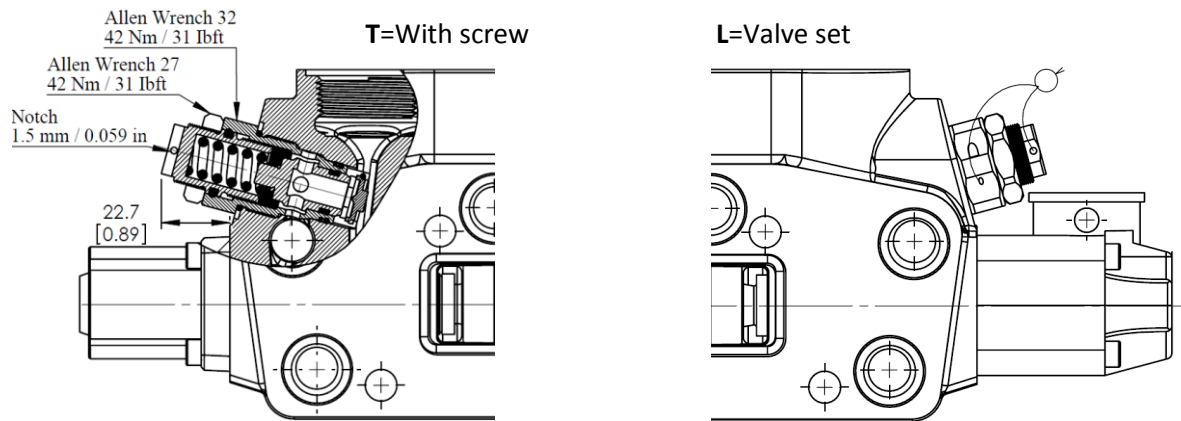

Performance Data: _____ →

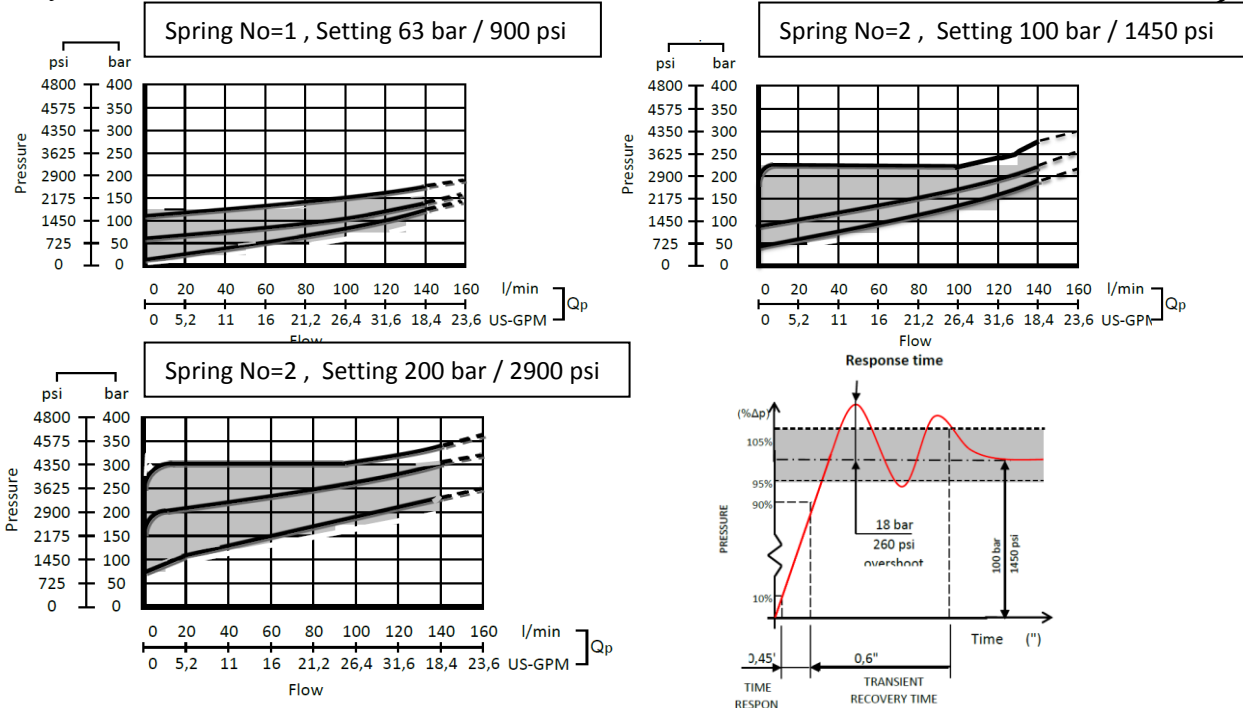

Port Valves Options



Anti shock Valves

Code: _____ →

YAS – 1 → 1= Mounted Port A , 2=Mounted Port B , 3=Mounted Port A and B

Hydraulic Diagram		
Kit No: YAS1	Kit No: YAS 2	Kit No: YAS 3

Adjustment Type on Valve And Data: _____ →

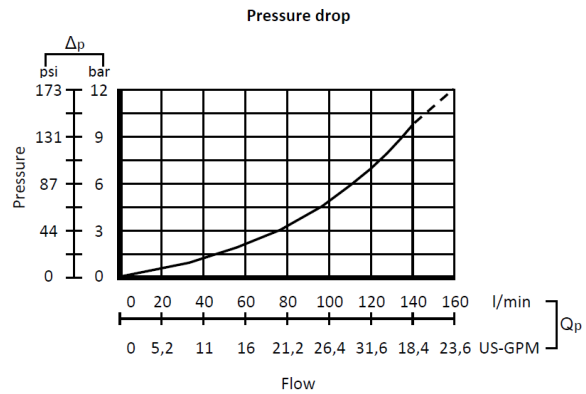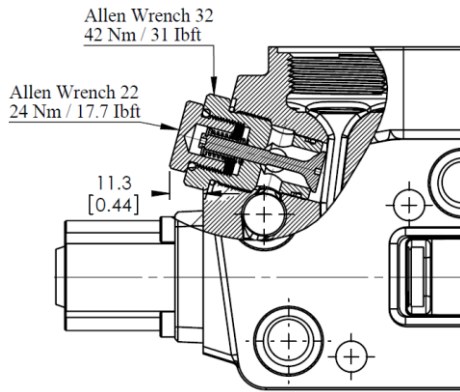

Valve Blanking

Plug with tank connection

DST-1 (1: Mounted port A – 2: Mounted port B)

Sectional Appearance	Hydraulic Diagram	
	DST1 	DST2

Plug

YP-1 (1: Mounted port A – 2: Mounted port B – 3: Mounted port A and B)


Sectional Appearance	YP1	YP 2	YP 3

Installation and Maintenance

The GM-PD150 valve is assembled and tested as per the technical specification of this catalog.

Before the final installation on your equipment, follow the below recommendation:


- The valve can be assembled in any position, in order to prevent body deformation and spool sticking mount the product on a flat surface;
- In order to prevent the possibility of water entering the lever box and spool control kit, do not use high pressure wash down directly on the valve;
- Prior to painting, ensure plastic port plugs are tightly in place.

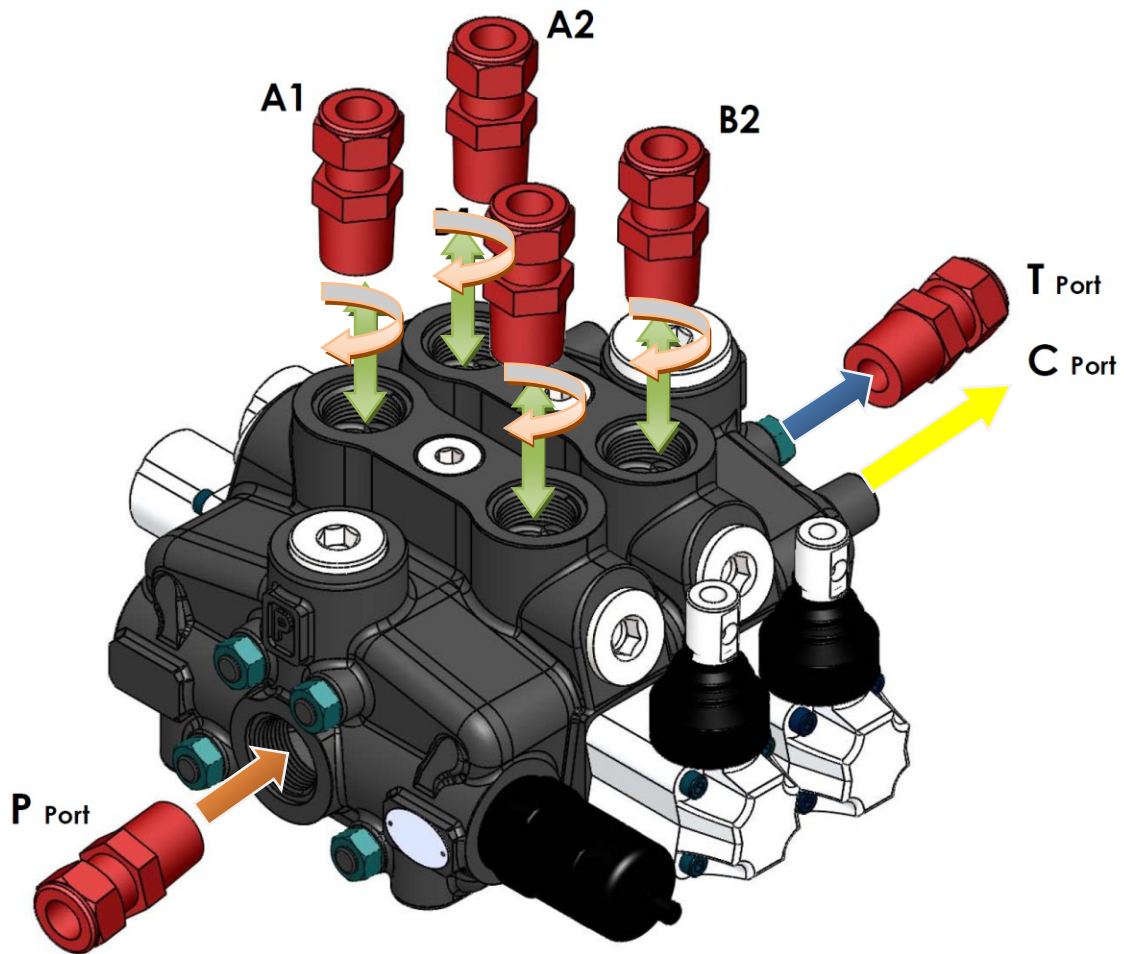


Threads Type	P Port	A and B Port	T Port
BSP (ISO 228/1)	G 3/4	G 3/4	G 1
With O-Ring seal	70 / 51.6	70 / 51.6	100 / 73.7
With copper washer	70 / 51.6	70 / 51.6	90 / 66.3
With steel and rubber washer	70 / 51.6	70 / 51.6	100 / 51.6
BSP (ISO 228/1)	G 1	G 1	G 1
With O-Ring seal	100 / 73.7	100 / 73.7	100 / 73.7
With copper washer	90 / 66.3	90 / 66.3	90 / 66.3
With steel and rubber washer	100 / 51.6	100 / 51.6	100 / 51.6
UN--UNF (ISO 11926--1)	1 5/16--12 UNF--2B	1 1/16--12 UNF--2B	1 5/16--12 UNF--2B
With O-Ring seal	150 / 110.6	95 / 70	150 / 110.6

Technical Data

Ports Dimensional Data

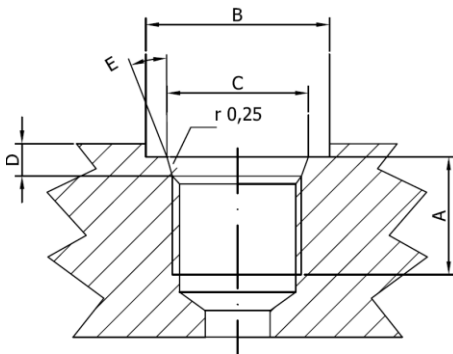

SAE UN-UNF (ISO 725)							
Dimensions		7/8-14 UNF SAE10		1"1/16-12 UN SAE12		1"5/16-12 UN SAE16	
Mm	In						
A		17	0,67	20	0,79	20	0,79
B		34	1,34	41	1,61	49	1,92
C		23,9	0,94	29,2	1,15	35,5	1,40
D		2,5	0,10	3,3	0,13	3,3	0,13
E		15°		15°		15°	

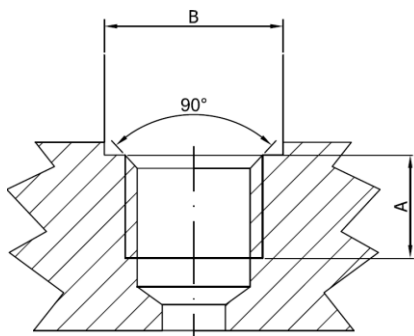

BSP (ISO 228)							
Dimensions		G 1/2"		G 3/4		G 1	
Mm	In						
A		16	0,63	18	0,71	20	0,79
B		27	1,06	33	1,30	40	1,57